
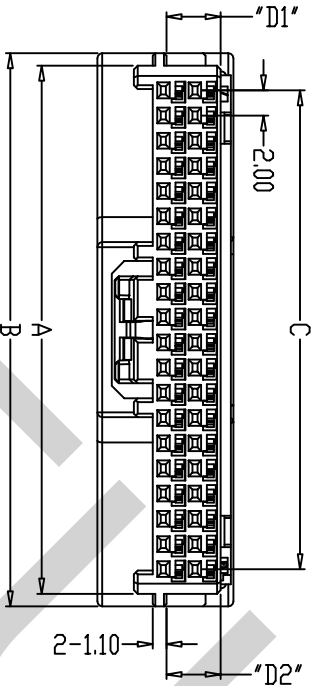

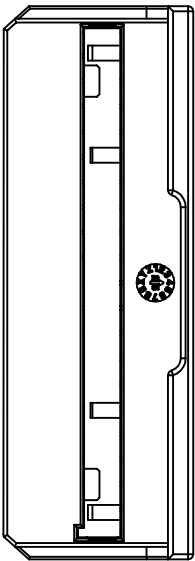
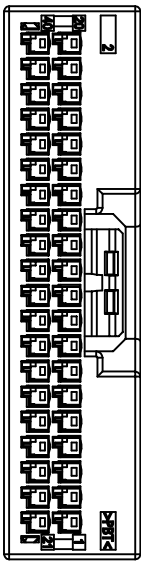
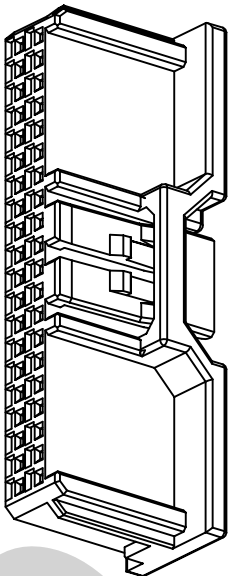


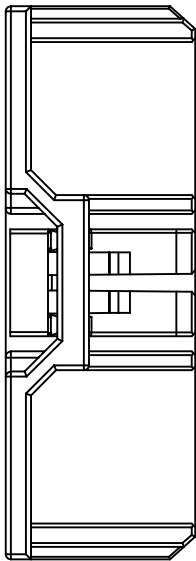

	D1	D2
KEY-1	13065S-2-**A	4.30
KEY-2	13065S-2-**B	2.75
KEY-3	13065S-2-**C	1.20
KEY-4	13065S-2-**K	1.20
KEY-5	13065S-2-**L	4.30

01.01020.40200BM-1

KEY-1

黑色

PIN数

PIN数	品番	A	B	C
24	13065S-2-24*	26	27.9	22
28	13065S-2-28*	30	31.9	26
32	13065S-2-32*	34	35.9	30
36	13065S-2-36*	38	39.9	34
40	13065S-2-40*	42	43.9	38

NOTE:
1. THE RETENTION LATCH LF THE RETAINER MUST BE OUT
SIDE OF SOCKET HOUSING WHEN PRE-ASSEMBLY.(RETAINER IS
IN PRE-ASSEMBLED CONDITION)
2. WHEN THE RETAINER IS IN FINAL LOCK CONDITION AT THE
SHIPPED TO CUSTOMER,IT MUST BE UNLOCKED TO
PRE-ASSEMBLED CONDITION.

FUOURS Technology (Dongguan) Co., Ltd				EXTEND USE		TITLE			
GENERAL TOLERANCE ①		MATERIAL PBT		APPD		DWG NO 01020_13065S			
DIMENTION		ANGLES		QTY		CHD		P/N# XXXXXX	
X. ±0.20		X° ±2°							
X.X ±0.10		X.X' ±1'							
XXX ±0.05		XXX' ±0.5°		FINISH		DRN		SHEET 1/1	
XXXX ±0.03		▽▽▽▽▽▽▽▽		 		2025/03/00		SCALE 1:1	
								UNIT mm	
								REV A0	